

encimeras FINTOP+

Encimera de cocina, desarrollada como solución horizontal a la altura de las exigencias del día a día. Tiene protección antibacteriana y se presenta con diseño decorativo en la parte superior, contracara y canto posterior aislante.



CARACTERÍSTICAS PRINCIPALES

SOPORTE Superpan Decor Hidrófugo 1-3/16" - 42 kg/ud Superpan Decor Hidrófugo 38mm - 53 kg/ud

DIMENSIONES 25-3/16" x 12"

CANTO FRONTAL Postformado doble: Radio 1/8"

OTRAS CARACTERÍSTICAS Canto trasero genérico

Junta selladora Contracara recubierta Protegido con film

OBSERVACIONES La diversidad de colores y posibilidades también permiten que este producto se utilice para otras aplicaciones como: mesas de trabajo, mobiliario de hostelería, etc. Disponibilidad de:

- Canto en rollo de cada diseño para rematar los laterales.
- Perfiles de aluminio para unión en recto y esquina.
- Herraje para unión de encimeras

PERFILES DISPONIBLES



MÁS INFORMACIÓN

Gama de encimeras de cocina desarrollada sobre nuestro exclusivo SuperPan Hidrófugo, que le confiere al producto una elevada resistencia al impacto, una calidad de corte superior para uniones perfectas y una mayor resistencia a ambientes húmedos.

Se ofrece en dos espesores, en 30 mm y en 38 mm aportando una sensación de firmeza y robustez. Toda la gama Fintop+ se sirve postformada por el frente aportando una imagen de continuidad y evitando juntas que acumulen suciedad.

Gracias a la tecnologia utilizada en el recubrimiento melamínico, ofrecemos unos productos similares a productos naturales en diseño y textura aptos para el contacto con alimentos, de fácil limpieza, resistente y con un tratamiento antibacteriano.

Hemos realizado una selección de decorativos que incorpora diseños exclusivos para todo tipo de gustos. La mayoría de las referencias son de nuestra Gama Duo, lo que facilita enormemente la combinación con frentes y remates, así como el hecho de utilizar los mismos tonos en proyectos con espacios compartidos, como por ejemplo las cocinas abiertas al salón.

También fabricamos mostradores bajo pedido.

Para garantizar una vida útil lo más amplia posible, las encimeras Fintop+ vienen con la contracara recubierta y con la parte posterior canteada. También incorporamos una junta selladora en la parte frontal para evitar goteo de agua hacia el interior del mueble.



















DISEÑOS Fintop 30 Pallet

Fintop 30 Picking



44V- Luna Nueva Moa 30 mm



72Y- Mármol Blanco Balm 30 mm



1AT- Mármol Hades Bolm 30 mm



MADERAS

Maa 30 mm



06Y- Wild Wood Antiq 30 mm



030- Blanco Super Bolin 30 mm

ACABADOS



Moa

Textura efecto piedra abujardada mate y de tacto suave. Dispone de una estructura hornogêna que se funde a la perfección con variedad de tipologías de decorativos: cementos, piedras calizas, granitos, terrazos, óxidos...



Balm

Textura super mate y de agradable tacto cálido que aporta un buen comportamiento ante manchas por huellas. Balm es un acabado muy versátil, que funciona perfectamente con unicolores, metalizados o mármoles sin apagar la intensidad o colores de los decorativos.



Antiq

Textura muy profunda con efecto madera cepillado rústico. Al tacto aporta calidez y 8 la vista ee mate. Su estructura homogénea es muy versátil y combina tanto con maderas trianquilas, como con maderas rústicas y entabilladas.



Ave. Kennedy, sector Bechara, San Juan | 787-474-3333 info@maderas3c.com | www.maderas3cpr.com

Finsa Process

Ensamblaje para unión de encimeras

Herraje ultraplano para encimeras delgadas

CARACTERÍSTICAS PRINCIPALES

- Compatible con encimeras Compac 13 mm.
- Válido para otros productos que permitan un mecanizado mínimo de 11 mm de profundidad.
- Sistema de unión oculta con doble luna y tornillo de rosca métrica.
- Tornillo con cabeza almenada para apriete con destornillador plano.
- Servido en cajas de 20 ud. embolsadas individualmente.


ESPECIFICACIONES

1x Tornillo M6 x 65 con cabeza almenada

1x Media luna sin rosca


1x Media luna rosca M6

Introducir primero la Luna sin rosca con la cara plana hacia la cabeza del tornillo y, a continuación, la luna roscada en el extremo del tornillo con la cara plana hacia fuera.




MECANIZACIÓN

Opción A - Con canal



Opción B - Sin canal




* Para esta opção (B), é necessário reduzir o parafuso em aproximadamente 30 mm.

	Imagen	Código SAP	Nombre herraje	Descripción		
Complementos encimeras		40727079	TAPA REMATE CANTO ENCIMERA FINTOP+ ALUMINIO MATE 30 mm	Espesor encimera = 30 mm Longitud = 650 mm		
	K	40727150	UNIÓN ESQUINA 90° ENCIMERA FINTOP+ 30 mm ALUMINIO MATE	Para unir encimeras a 90° Espesor encimera = 30 mm Longitud = 650 mm		
	No.	40727151	PROLONGACIÓN RECTA ENCIMERA FINTOP+ 30 mm ALUMINIO MATE	Para unir encimeras en línea recta (prolongar) Espesor encimera = 30 mm Longitud = 650 mm		
	4071963		COPETE LISO 45° PÁSTICO CON TAPA ALUMINIO MATE	Longitud = 4000 mm		
	41	40719633	TAPAS COPETE LISO 45° PLÁSTICO GRIS	Para rematar los extremos de los copetes		



Ave. Kennedy, sector Bechara, San Juan | 787-474-3333 info@maderas3c.com | www.maderas3cpr.com



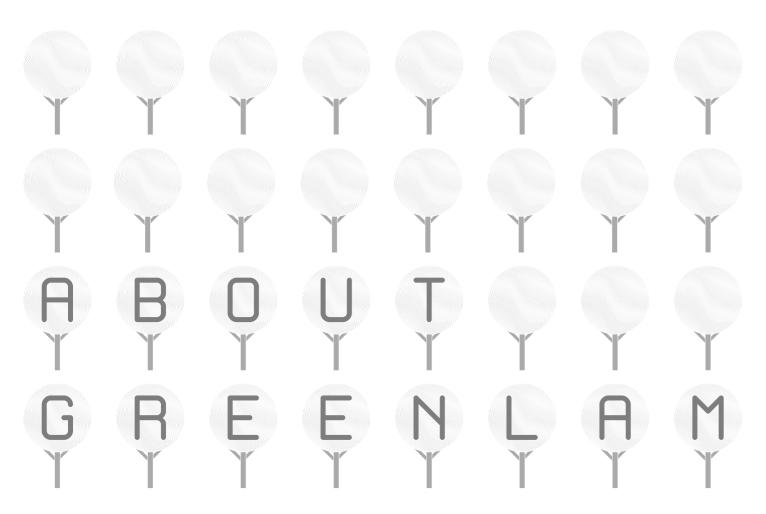

Every artist needs a canvas. For Greenlam, every home is one. Greenlam takes pride in being the pioneer of trends in surface solutions across the globe. With two state-of-the-art manufacturing facilities and a combined output in excess of 15.62 million laminate sheets per annum, Greenlam Laminates stands tall as among the top 3 manufacturers in the world.

Greenlam products are evidence of its commitment towards exceptional artistry, innovation, unsurpassed quality and unyielding passion for excellence. A team of more than 3750 employees and a network of over 12,000 partners in over 100 countries ensures that our beautiful designs reach architects, interior designers, and end consumers who demand newness in their spaces. They are the ones who truly inspire us to innovate and ideate towards delivering the best.





CONTENTS

ELEMENTS OF ELEGANCE	01
THE STRATUS COLLECTION	03
WORKTOPS =====	05
AFX ANTI-FINGERPRINT WORKTOPS	07
BREAKFAST BARS	09
UPSTANDS ======	11
SPLASHBACKS ======	13
CORES & TEXTURES	15
DECORS	17
AVAILABILITY CHART	19
TECHNICAL SPECIFICATIONS	21
CERTIFICATIONS	23















SAFE CONTACT WITH FOOD



SELF

SUSTAINABLE SUPPORTING (12MM)



HEAT RESISTANT



EASY TO FABRICATE



AIR QUALITY GREENGUARD

CERTIFIED

ITS THICKNESS



TEMPERATURE NEUTRAL



HIGH WEAR RESISTANCE



FIRE RESISTANT



IMPACT RESISTANT



BEAUTIFUL **TEXTURES**





Featured Worktop, Breakast Bar, Upstand and Splashback in 5573 Neputunite – Texture Terra



UBKTOPS

SLIMLINE & DURABLE. As design trends have developed to thinner worktops, the Stratus range of 12mm compact worktops takes the design solutions available to a whole new level. These durable, modern designs with a range of textures, offer sleek lines combined with a high level of performance in the demanding kitchen environment.

Size - 3050x640mm | Thickness -12mm | Core- White, Brown, Grey, Black | Texture - Essentia, Terra, Satin, Suede



AFX: ANTI-FINGERPAINT

INNOVATIVE SURFACE FINISHES. Specially treated, the Stratus AFX worktop collection boasts a unique surface performance that's super matt, non-porous and hydro-repellent, making it effortless to clean away fingerprints, impurities and grease marks. These features combine to make the AFX collection an impressive addition to any kitchen.

















BIBBIANT

A DESIGN MASTERPIECE FOR ANY SPACE. The Stratus range

includes a breakfast bar module. This can be easily adapted to your space requirements. Sinks and cookers can be readily incorporated to suit any design layout.

Size - 3050x965 | Thickness - 12mm | Core - White, Brown, Grey, Black | Texture - Essentia, Terra, Satin, Suede



UPSTRIDS

11

THE PERFECT DRESSING. Stratus range of 12mm thick upstands allow you to match or effectively contrast your chosen worktop. A modern and smart alternative to tiles, these upstands stand up against food and water stains, to complement your worktops in the most seamless way.

Size - 3050x95mm | Thickness - 12mm | Core - White, Brown, Grey, Black | Texture - Essentia, Terra, Satin, Suede



SPLASHBACKS


THE ART OF WALL DRESSING. The Stratus Collection includes a range of Splashback panels for completing your design. This compelling alternative to traditional tiles are durable and easy-to-installed. Continuity or contrast, whatever you fancy, you can have a pick from either the same décor and textures as worktop and breakfast bar or choose contrasting decors from an exclusive range.

Size - 3050x1300mm and 2440x1220mm

Thickness - 3mm & 0.7mm

Texture - Essentia, Terra, Satin, Suede, Gloss,

Tile, Micro-tile, Subway-tile







CORES



5416-30 glacier oak • 5574-30 statuario



5854-30 copper taint



5923-30 centurion



- 5952-30 black marquina
- 5331-30 midnight acacia
- 5758-30 artisian oak
- 9611-30 innate ash

DÉCORS

STONES & CONCRETES










W B U 5923 · Centurion

BLACK MARQUINA



• 5952 • black core

WOODGRAINS






W B U 5758 · Artisan Oak





5331 . Midnight Acacia

TEXTURES



A subtle classic finish suited for all type of decors, be it concrete, stone, wood or solid.



AVAILABILITY CHART

			Compacts 12mm		Compa	cts 3mm	HPL 0.7mm		
Design No.	Design Name	Worktops 3050 x 640 x 12mm	Breakfast Bars 3050x965x12mm	Upstands 3050 x 95 x 12mm	Splashback Panels 3050 x 1300 x 3mm	Splashback Panels 2440x1220x3mm	Splashback HPL 3050 x 1300 x 0.7mm	Splashback HPL 2440 x 1220 x 0.7mm	
		DÉCOR AVAILAB	ILITY						
Stones &	Concretes								
5574	Statuario	Yes	Yes	Yes	Yes	N/A	Yes	N/A	
5575	Black Marmor	Yes	Yes	Yes	Yes	N/A	Yes	N/A	
5577	Houston	Yes	Yes	Yes	Yes	N/A	Yes	N/A	
5578	Madison	Yes	Yes	Yes	Yes	N/A	Yes	N/A	
5773	Neptunite	Yes	Yes	Yes	Yes	N/A	Yes	N/A	
5774	Antico	Yes	Yes	Yes	Yes	N/A	Yes	N/A	
5854	Copper Taint	Yes	Yes	Yes	Yes	N/A	Yes	N/A	
5923	Centurion	Yes	Yes	Yes	Yes	N/A	Yes	N/A	
Woo	ds				<u> </u>				
5076	Primeval Oak	Yes	Yes	Yes	Yes	N/A	Yes	N/A	
5331	Midnight Acacia	Yes	Yes	Yes	Yes	N/A	Yes	N/A	
5416	Glacier Oak	Yes	Yes	Yes	Yes	N/A	Yes	N/A	
5427	Refresh Oak	Yes	Yes	Yes	Yes	N/A	Yes	N/A	
5758	Artisan Oak	Yes	Yes	Yes	Yes	N/A	Yes	N/A	
9610	Pure Ash	Yes	Yes	Yes	Yes	N/A	Yes	N/A	
9611	Innate Ash	Yes	Yes	Yes	Yes	N/A	Yes	N/A	
AFX- Anti-l	fingerprint				•	•	•	•	
9851	White X	Yes	Yes	Yes	Yes	N/A	Yes	N/A	
9852	Eden Grey	Yes	Yes	Yes	Yes	N/A	Yes	N/A	
9861	Black X	Yes	Yes	Yes	Yes	N/A	Yes	N/A	
Solid	ds								
107	Wool	N/A	N/A	N/A	Yes	Yes	Yes	Yes	
108	Absolute White	N/A	N/A	N/A	Yes	Yes	Yes	Yes	
124	Mysore Ivory	N/A	N/A	N/A	Yes	Yes , , \		/////Yes	
132	Cyclone	N/A	N/A	N/A	Yes	Yes	Yes	Yes	
181	Chocolate	N/A	N/A	N/A	Yes	Yes		//////Xes///	
275	Pearl Grey	N/A	N/A	N/A	Yes	Yes	Yes	Yes	
277	Charcoal	N/A	N/A	N/A	Yes	Yes	//////Yes\\\\\/	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	
401	Black	N/A	N/A	N/A	Yes	Yes	Yes	Yes	
	Т	EXTURE AVAILA	BILITY						
	Essentia	Yes	Yes	Yes	Yes		Yes	V/////////////////////////////////////	
Worktop &	Terra	Yes	Yes	Yes	Yes	N/A	N/A	N/A	
Splashback	Satin	Yes	Yes	Yes	Yes -	-///MA/////	Yes	N/A	
Textures	AFX	Yes	Yes	Yes	Yes	N/A	Yes	N/A	
	Suede	Yes	Yes	Yes	Yes	///Yes///////		Yes /	
	Gloss	N/A	N/A	N/A	Yes	Yes	Yes	Yes	
Splashback	Tile	N/A	N/A	N/A	N/A ///	Yes//////	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\		
Exclusive	Microtile	N/A	N/A	N/A	N/A	Yes	N/A	N/A	
Texture	Subway-tile	N/A	N/A	N/A	N/A //	Yes		V//////WA///	

19

TECHNICAL

SPECIFICATIONS

S. No.	Properties	Unit	Test method as per EN 438 Part 2 & 4: 2016		Typical Results Greenlam	Specified values	Typical Results Greenlam	Test method as per EN 438 Part 2 & 4: 2016	Specified values	Typical Results Greenlam
	Nominal Thickness	mm		12mm		3mm	1	'	0.7m	m
1	Classification		EN 438-4 - 4	Compact General purpose standard, CG\$		Compact General pur	Compact General purpose standard, CGS		HPL General purpo	se standard, HGS
2	Thickness	mm	EN 438-2 - 5	12.0 ± 0.50	complies	3.0 ± 0.30	complies	EN 438-3-6.3	0.7 ± 0.10	complies
3	Resistance to Dry Heat at 160° C	Rating	EN 438-2 - 16	Not worse than 4	5	Not worse than 4	5	EN 438-2 - 16	For Gloss finish - 3 For Other finish - 4	≥ 3 ≥ 4
4	Length & Width	mm	EN 438-2 - 6	+10mm/-Nil	complies	+10mm/-Nil	complies			
5	Resistance to Surface Wear	Rev.	EN 438-2 - 10	350 (min.)	complies	350 (min.)	complies	EN 438-2-10	350 (min.)	400 (min.)
	Resistance to Immersion in Boiling Water (2 hours)		EN 438-2 - 12							
6	Mass Increase	%		2.0 (max.)	0.24	2.0 (max.)	0.94	EN 438-2-12		
	Thickness Increase	%		2.0 (max.)	0.68	2.0 (max.)	1.48			
		D		Not worse than 4	5	Not worse than 4	5		For Gloss finish - 3	≥ 3
	Appearance	Rating							For Other finish - 4	≥ 4
7	Dimensional Stability at Elevated Temperature		EN 438-2 - 17					- EN 438-2-17		
	Longitudinal Direction	%		0.30 (max.)	0.08	0.40 (max.)	0.28		0.55 (max.)	0.39
	Transverse Direction	%		0.60 (max.)	0.15	0.80 (max.)	0.38		1.05 (max.)	0.55
8	Resistance to Impact by Large Diameter Ball		EN 438-2-21	1000	1000	1,400	1500	EN 438-2-20	20 (min.)	25 (min.)
	Drop Height			1800	1900	1400	1500			
	Diameter of Indentation			10 (max.)	7	10 (max.)	7		201:1	
9	Resistance to Scratching Resistance to Staining	N	EN 438-2 - 25	2.0 (min.)	2.5	2.0 (min.)	2.5	EN 438-2-25	3.0 (min.)	≥ 3
10	Group 1 & 2	Rating	EN 438-2 - 26	5	5	5	5	EN 438-2-26	5	5
	Group 3	Kalling		4	≥ 4	4	≥ 4		4	≥ 4
11	Resistance to Wet Heat @100°C	Rating	EN 438-2 - 16	Not worse than 4	5	Not worse than 4	5	EN 438-2-18	For Gloss finish - 3 For Other finish - 4	≥ 3 ≥ 4
12	Light fastness (Xenon Arc Lamp) - Grey Scale Contrast	Rating	EN 438-2 - 27	4 to 5	Complies	4 to 5	Complies	EN 438-2 - 27	4 to 5	Complies
13	Resistance to Crazing	Rating	EN 438-2 - 24	Not worse than 4	5	Not worse than 4	5			
14	Flexural Modulus	Мра		9000 (min.)	Complies	9000 (min.)	Complies///			
15	Flexural Strength	Мра	EN ISO 178:2003	80 (min.)	Complies	80 (min.)	Complies			
16	Density	g/cm3	EN ISO 1183 - 1:2004	1.35	1.38	1.35	1.39	EN/ISO/1/183-1	1.35	1,4

Note: Whereas Greenlam products are manufactured thoroughly to standards, the nature of the application procedure is beyond our control. The values given above are to the best of knowledge but without liability/warranty, expressed or implied.



Safe and Healthy Living alongside Greenlam Products

The entire range incorporates Safeguard PlusTM, a revolutionary development that retards the growth of the vast majority of common bacteria. This means our products are ideal for laboratories, kindergartens, offices and domestic environments.



GREENGUARD Certification Program

GREENLAM® laminates are classified under the Low Emitting Product category when measured for potentially harmful emissions. This is an assurance that our products are ideal for use in interior environments where air quality is vitally important.



GREENGUARD Gold Certification

This certification, with a stricter criteria, means that GREENLAM® products are suitable for use in environments where children spend significant periods of time, including schools, daycares and healthcare facilities.



GREENLAM® products have been awarded CE certification which is given to those manufacturers who declare that the product complies with the essential requirements of the relevant European health, safety and environmental protection legislation, in practice by many Product Directives. CE Marking on a product indicates to government officials that the product may be legally placed in the market in their country.



All **GREENLAM®** Laminates are certified by the prestigious American body, NSF International, making them the safest laminates for human health. Our surfaces can be used in situations where they will have direct contact with food. "Our surfaces have also been tested in accordance with EC directive 1935 with regards to food safety. Our products were proved fully compliant through testing to the demanding EU Food Commission Regulation 10/2011 with successful testing to BSEN 1186-1:2002, BSEN 1186-3:2002 & BSEN 1186-14:2002".

EN 438-2 **GREENLAM®** products are tested in accordance to BS EN 438 – 2 and strictly conforms to all the testing standards for dimensional stability and performance levels such as boiling water, moisture, impact, scratches and stain resistance.

APPROVED BY THE WORLD

